

Wafer Double Door Check Valve

SES Wafer Double Door Check Valve


Application:

Check valves are used for preventing back flow of liquid medium in pipes. The valves close automatically with the return flow of the liquid medium.

PN 10, 16, 25 Bar Rated



Material List		
Item	Part	Material
1	Disc	Nickel Plated Ductile Iron, Bronze, Aluminium Bronze or Stainless Steel (304,316 CF8M)
2	Stem	Stainless Steel (13%Chrome)
3	Gasket	NBR Rubber, Also Available EPDM or Viton
4	Spring	Stainless Steel
5	Body	Cast Iron (GG 25), Epoxy Powder Coated or Stainless steel

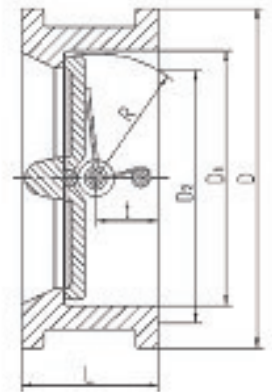

Size		Dimensions						
mm	Inch	D	D1	D2	L	R	T	Weight (kg)
50	2"	107	65	43.3	43	28.8	19	1.5
65	2.5"	127	80	60.2	46	36.1	20	2.4
80	3"	142	94	66.4	64	43.4	28	3.6
100	4"	162	117	90.8	64	52.8	27	5.7
125	5"	192	145	116.9	70	65.7	30	7.3
150	6"	218	170	144.6	76	78.6	31	9
200	8"	273	224	198.2	89	104.4	33	17
250	10"	328	265	233.7	114	127	50	26
300	12"	378	310	283.9	114	140	43	42
350	14"	438	360	332.9	1237	152	45	55
400	16"	489	410	381	140	152	52	75
450	18"	539	450	419.9	152	217.8	58	101
		555						107
500	20"	594	505	467.8	152	241	58	111
600	24"	695	624	572.6	178	295.4	73	172
700	28"	820	720	680	229	338.5	98	219
800	32"	915	825	744	241	385.5	100	
900	36"	1015	927		241	455.5	100	

17 Resnick Street,
Factoria,
Krugersdorp,
Gauteng.

Phone: +27 11 955 4690
sales@spirotech.co.za

www.spirotech.co.za

GPS: S26° 06,859'
E027° 48,680'

Technical Queries:
Martin Van Meygaarden
+27 82 903 2917
martin@spirotech.co.za